


PF-XCU-AL (PIO)630VDC Audio Capacitors Paper in Oil, Copper Foil

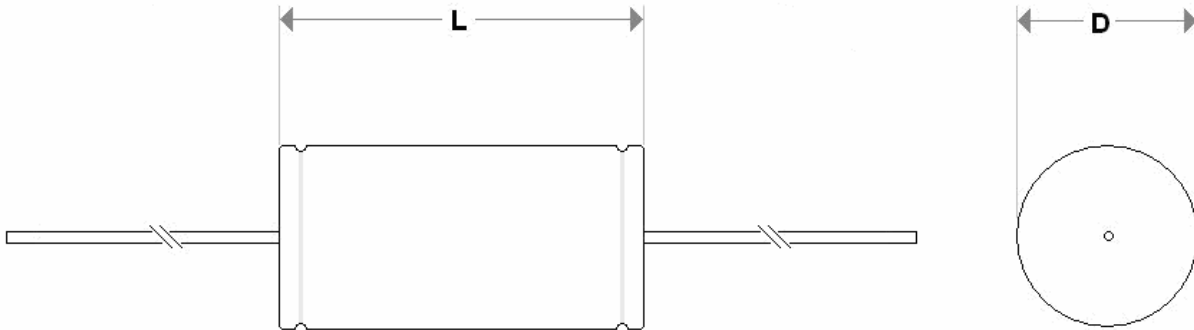

CAPACITANCE μF	D	L
0.001 – 0.068	15mm	34mm
0.068+ – 0.47	25mm	54mm
0.47+ - 1.0	35mm	54mm
1.0-2.0	45mm	95mm

AMPOHM Audio Capacitors are specially designed for high performance audio systems, used in various applications. These paper in oil (PIO) capacitors are hand wound using high purity copper foil and have their 1.0mm diameter (0.8mm diameter 0.068 μF and below) tinned copper leads hand solder sealed to the eyelets in the end discs. They are oil impregnated before being assembled oil filled and hermetically sealed in an aluminium housing with phenolic resin and rubber end discs, all being individually hand tested.

Custom Designs available

Type: PF-XCU-AL
Capacitance: 0.001 μF – 2.0 μF
Dissipation Factor: < 0.01@ 1KHz
Tolerance: +/- 20% up to 0.1 μF
 +/- 10% up to 2.0 μF
 +/- 5% above 5.0 μF
Rated Voltage: 630V DC
Temperature Range: -40 to +85C
Outer Foil: Line on label denotes outer foil

Marking:

AMPOHM	AUDIO CAPACITOR
TYPE	SPEC
VALUE - VOLTAGE	DATE CODE

Line on label denotes outer foil

Witness Innovation... Experience Technology



Registered Office: Ampohm Wound Products Ltd, Knaresborough Technology Park, Manse Lane, Knaresborough, North Yorkshire, HG5 8LF
 Tel: 01423 865641 • Fax: 01423 798246 • E-mail: sales@ampohm.co.uk • Website: www.ampohm.co.uk

Witness Innovation... Experience Technology



Registered Office: Ampohm Wound Products Ltd, Knaresborough Technology Park, Manse Lane, Knaresborough, North Yorkshire, HG5 8LF
Tel: 01423 865641 ▪ Fax: 01423 798246 ▪ E-mail: sales@ampohm.co.uk ▪ Website: www.ampohm.co.uk

Registered in England & Wales No: 5654904

VAT Registration: 874 7628 73

(a subsidiary of GSPK Circuits Ltd)