



5881

A. F. BEAM PENTODE



Base: OCTAL

$$U_f = 6,3 \text{ V}$$
$$I_f = 0,9 \text{ A}$$

Typical Characteristics: Class A1:

Single tube Push-Pull


$U_a = 250$	270	V
$U_{g2} = 250$	270	V
$U_{g1} = -14$	-17,5	V
$I_a = 63$	134	mA
$I_{g2} = 4,3$	11	mA
$R_{a-a} = 2,5$	-	k Ω
$R_{a-a} = -$	5	k Ω
$N = 6,7$	17,5	W

Limiting Values:

	Triode	Pentode	
$U_a = 450$	500		V
$U_{g2} = 450$	450		V
$W_a = 26$	23		W

Grid No 1 Circuit Resistance

Fixed Bias	0,1	M Ω
Self Bias	0,5	M Ω

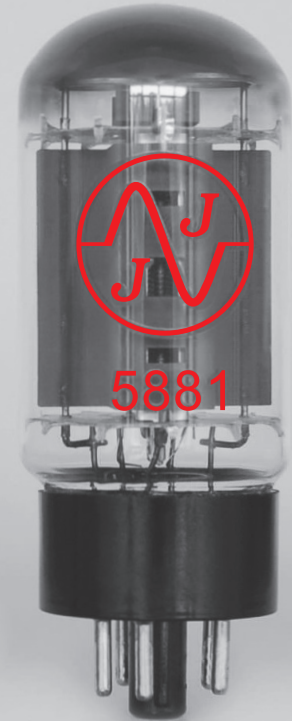

TRANSFER CHARACTERISTICS

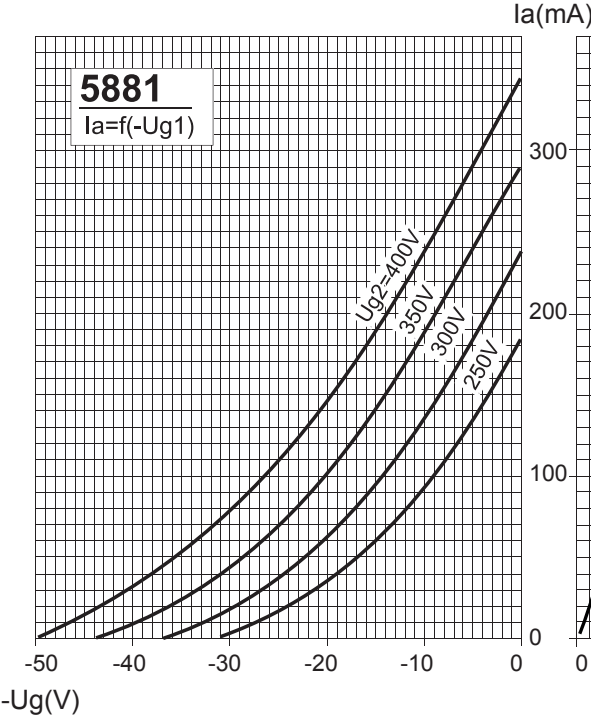


PLATE CHARACTERISTICS

