

Preferred Series 6L6WGC

Specifications:

Filament Heating

Voltage.....6.3V (+/- 5%)
 Current.....0.9 A

Maximum Ratings

Plate voltage.....550 V
 Second grid voltage.....500 V
 First grid voltage.....-100 V
 Plate dissipation.....30 W
 Second grid dissipation.....5 W
 Maximum grid resistance:
 For cathode-bias 0.5 M ohm
 For fixed-bias..... 100 K ohm

Capacitances

Input capacitance.....10 pF
 Output capacitance..... 6.6 pF
 First grid-heater capacitance..... 0.7 pF


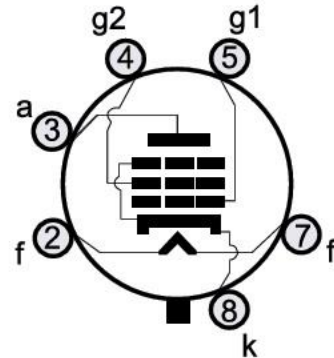


Plate Characteristics

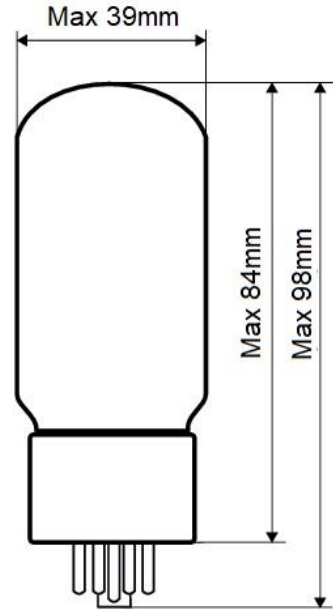