


# How to bias:

## Belair212, Nomad



Rev A  
8/18/2009

**CARVIN**  
carvinservice.com



**Only a certified technician should bias Carvin amps, this is very dangerous, you can get hurt, please be very careful when working with any tube amp!**

If you have changed the tubes make sure they are a matched set. When you bias the amp at **75mA** and the tubes are matched you will have the desirable 20mA going through each of the 4 Power tubes.

- The Bias for the Belair212, Nomad should be **75mA** at 120VAC.

#### STEP 1



These are the tools you will need:

1. A flat head screw driver "small".
2. A multi-meter, w/ milli amp reading.
3. Banana to clip leads.
4. Amp stand (optional).

#### STEP 2



Take the amp out of the amp enclosure (cabinet). Set it in an amp stand. Be very careful with the tubes they can break.

NOTE: If you don't have an amp stand then support the chassis on some blocks of wood so that the power tubes are not touching anything - they get very hot!

### STEP 3



Plug in speaker to output 1 or 2, they are both the same, both jacks are in parallel.

NOTE: For speaker setup click on “Troubleshooting” and “Speakers”.

**IMPORTANT:** Do NOT turn on the amplifier without a speaker plugged in!"

### STEP 4



Make sure the OHM setting is correct. Improper setting will result in damage to the amp!

NOTE: On the back is where you will find the OHM setting, make sure the speaker matches the OHM setting.

### STEP 5




A) Lower the volume down on both channels.

B) Unplug your guitar cord from the input of the amp.

NOTE: If you have signal going through the amp, it will not be the true reading, when you set the bias.

## STEP 6

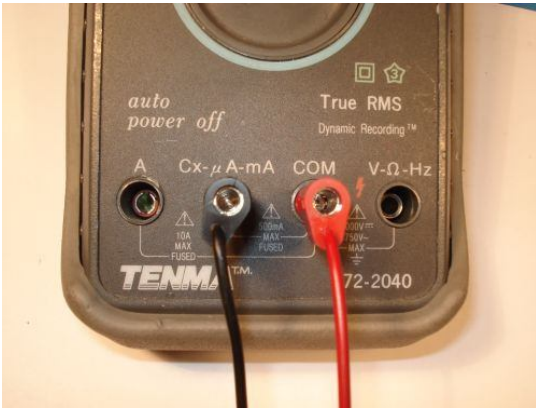


A) Connect the leads to the meter.  
Make sure the fuse inside is good.


B) Set your meter to the milliamp (MA) position.

NOTE: If the Fuse inside your meter is open, the meter will never work. It will always read 0mA. In the meter above, mA and COM is selected, you have the option to plug in the lead on (A) but because the setting will be set to 75mA it is best to use mA.

## STEP 7

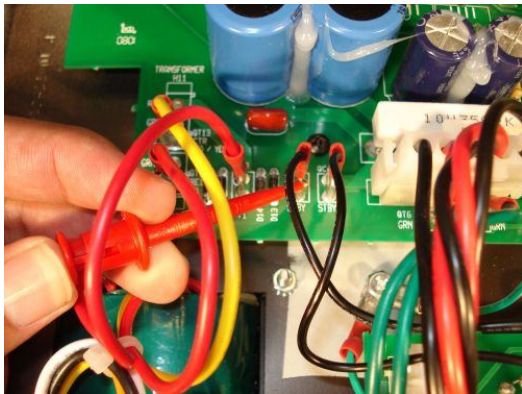

1.

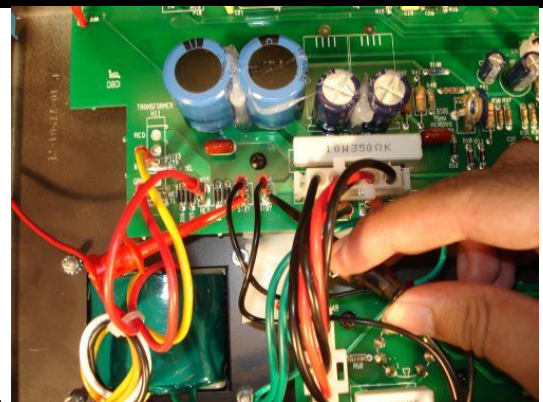

2.

Connect clips from meter to Standby Switch. It's easier to clip the leads to the wires that go from the standby switch to the main circuit board as pictured.

**IMPORTANT: Never power the amp ON before connecting the leads, you will get a big spark, you may blow the fuse of the Meter and or damage the amp.**

## STEP 8



Plug in AC Cord.

NOTE: Sometimes when the AC Cord is new it does not want to go in all the way. Push firmly to force it in, if that is the case.

## STEP 9



Turn the Power Button ON. Wait 2 minutes for the amp to get hot, after the 2 minutes you should see the meter read current. It will start slow then increase up to 75mA, adjust it accordingly.

NOTE: Do Not turn ON the Standby switch, leave it on STANDBY.

## STEP 10



Check your meter at this point, if it goes over 75mA, lower it by turning the bias potentiometer with the screw driver, clock wise, if it's under 75mA bring it up by turning the potentiometer the other way.

It is OK and normal for the bias reading to fluctuate a little bit and may not be exactly 75mA but as close as possible.

**IMPORTANT:** I was using a current shunt to measure the current that's why the pictures below shows mV, your meter should read (mA).



Good Bias



High Bias



Low Bias

#### STEP 11

Power down Steps:

1. Turn OFF the amp
2. Disconnect the meter leads.
3. Unplug your AC cord and wait for the tubes to cool down, so that you can put the amp back in the cabinet.

**IMPORTANT:** During biasing and normal amp operation if there is a burning smell or loud crackling noise that comes from the speaker, you should turn off the amp as your may have a bad tube. The same is true if your meter reads higher than 150mA or goes into overload. The tubes should never glow RED on the gray plate material, the largest metal part inside the tube. This indicates a major problem and extremely unsafe condition. If this happens turn off the amp immediately!

**IMPORTANT:** The tubes get very hot! Don't touch them, you will burn your skin if you do. If the amp is ON the tubes will get hot, even if you are not playing the amp, wait 30 minutes before handling the unit to ensure the amp cooled down.

**IMPORTANT:** This is not the only way to set the bias on this amp, this is the Carvin Approved method which is used on the Production line in the San Diego, California Factory.

NOTE: If the tubes are getting hot and 3 to 5 minutes went by and you don't see any reading on your meter check your meter, you may have the leads plugged into the wrong place in your meter or the fuse of your meter is open.

EXPORT(230-240VAC 50Hz): Follow the same instructions.

Comments or questions email us at [Carvinservice@carvin.com](mailto:Carvinservice@carvin.com)